



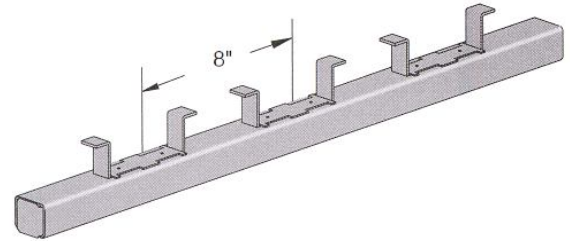

411 BURNHAM ST.
 P.O. BOX 280186
 EAST HARTFORD, CT 06108
 TEL (860) 289-0285 FAX (860) 282-1487
 TOLL FREE 1-800-969-0285

PS 349 CONTINUOUS CONCRETE INSERTS



MATERIAL: POWER-STRUT CONTINUOUS SLOTTED CONCRETE INSERTS ARE COLD FORMED FROM STRUCTURAL QUALITY STRIP STEEL.

FINISH: PLAIN PRE-GALVANIZED HOT DIPPED GALVANIZED



STOCK THICKNESS: .105 (12 GA.)

STOCK LENGTH: 20 FEET



NOTES:

- ◆ USE CHANNEL NUTS DESIGNED FOR PS 300 CHANNEL.
- ◆ NAIL OR ANCHOR THE INSERTS TO FORMS EVERY 16" TO 24"

FURNISHED WITH STEEL END CAPS AND PLASTIC CLOSURE STRIPS INSTALLED

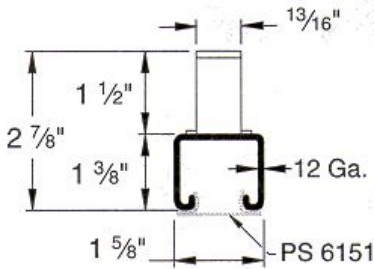

CHOICE OF END CAP IS BASED ON THE DISTANCE FROM THE END OF THE INSERT TO THE FIRST ANCHOR AS SHOWN BELOW.

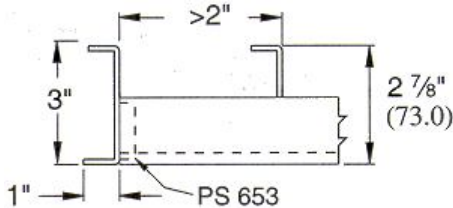

PART NO.	END CAP	WT./100	LOAD DATA Ω
PS 349 3" CS/EC	PS 653	72	500 lbs.
PS 349 4" CS/EC	PS 653	87	800 lbs.
PS 349 6" CS/EC	PS 653	117	1,000 lbs.
PS 349 8" CS/EC	PS 653	147	1,200 lbs.
PS 349 1' CS/EC	PS 653	194	2,000 lbs.
PS 349 1' 4" CS/EC	PS 656	253	2,000 lbs./ft.
PS 349 1' 8" CS/EC	PS 653	312	2,000 lbs./ft.
PS 349 2' CS/EC	PS 656	371	2,000 lbs./ft.
PS 349 2' 8" CS/EC	PS 656	490	2,000 lbs./ft.
PS 349 3' CS/EC	PS 653	549	2,000 lbs./ft.
PS 349 4' CS/EC	PS 656	727	2,000 lbs./ft.
PS 349 5' CS/EC	PS 653	905	2,000 lbs./ft.
PS 349 6' CS/EC	PS 656	1,082	2,000 lbs./ft.
PS 349 7' CS/EC	PS 653	1,260	2,000 lbs./ft.
PS 349 8' CS/EC	PS 656	1,438	2,000 lbs./ft.
PS 349 9' CS/EC	PS 653	1,615	2,000 lbs./ft.
PS 349 10' CS/EC	PS 656	1,793	2,000 lbs./ft.
PS 349 12' CS/EC	PS 656	2,148	2,000 lbs./ft.
PS 349 14' CS/EC	PS 656	2,504	2,000 lbs./ft.
PS 349 16' CS/EC	PS 656	2,859	2,000 lbs./ft.
PS 349 18' CS/EC	PS 656	3,215	2,000 lbs./ft.
PS 349 20' CS/EC	PS 656	3,570	2,000 lbs./ft.
PS 349 10' W/O	Insert Only	1,777	Ω UNIFORM RECOMMENDED LOADING ON INSERTS IN 3,000 PSI CONCRETE.
PS 349 20' W/O	Insert Only	3,554	

SUBMITTAL INFORMATION

CUSTOMER:		APPROVAL STAMP
PROJECT NAME:		
PROJECT NUMBER:	SECTION:	
PARAGRAPH:	OTHER:	