




Lockout Tags

Front Side Styles



Rev. Side 1	Rev. Side 1	Rev. Side 1	Rev. Side 1	Rev. Side 1
1AY0646	1AY0654	1AY0778	1AY0649	1AY0650
Rev. Side 2	Rev. Side 2	Rev. Side 2	Rev. Side 2	Rev. Side 2
1AY0776	1AY0658	1AY0660	1AY0657	1AY0667
Rev. Side 3	1AY0777			

Reverse Side Options

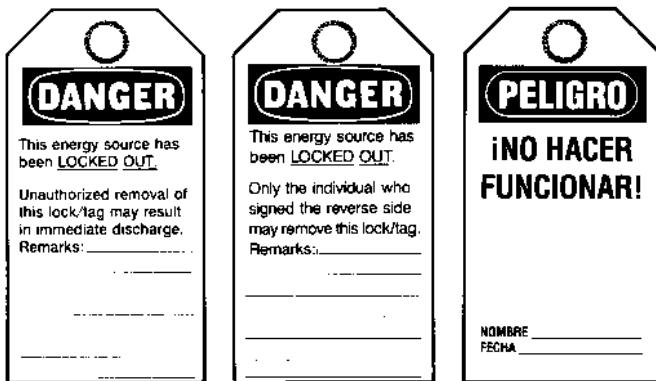

Reverse Side 1

Reverse Side 2

Reverse Side 3

Heavy Duty Lockout Tags

Tags comply with OSHA Lockout Standard. A reinforcing brass grommet with 7/16" diameter accepts most padlocks. The durable polyester laminate protects graphics and holds up against water, grease and extreme temperatures. Withstands up to 80 lbs. of pullout force. The matte surface finish allows employees to easily personalize tags with their name, department and estimated completion information as required by regulations. Tags measure 5 1/2" x 3". X To order tags choose from the front face styles shown at left. Reverse side refers to back face of tag shown above.

Safety Starter Kit

Includes (6) #3 Steel padlocks, (one of each color), 2 #420 safety lockout hasps, (6) 71Tag ID Tags, and (6) 71SC9 attachment collars. Great starter kit to any lockout/tagout program. P adlocks keyed differently.



Part No.	Description
1220DSPL	Safety Starter Kit

Safety Lockouts Hasps

Allows up to 6 workers to lockout a single energy source. Constructed of vinyl-coated high tensile steel and plated to resist rust. Accepts padlocks up to 3/8" shackle diameter. Available in two sizes, 1" and 1-1/2" diameter jaws. Sold twelve hasps per package.



Part No.	Description
420	Lockout, 1" diameter jaws
421	Lockout, 1-1/2" diameter jaws



Lockout Station

High visibility Lockout Stations make your locks, tags and lockouts easy to find and use. Built for the toughest conditions. Made of durable polycarbonate material. Available empty or stocked. Stations are yellow with black heading with yellow lettering.

20-Lock Department Station:

When stocked, components include 20 padlocks, 48 lockout tags and four 1" safety lockouts.

10-Lock Station:

When stocked components include 10 padlocks, 24 lockout tags and two 1" safety lockouts.

4-Lock Station:

When stocked components include 4 padlocks and 25 "Do Not Operate" Tags and 12 lockout tags.

Call for a full listing of Lockout/Tagout Electrical Safety Products





Pipemarkers / Safety Padlocks / Extinguishers

Fasteners

Anchors

Strut

Threaded Rod

Pipe Hangers

Tools


Abrasives

On-Site Supplies

Safe

Self-Sticking Pipe Markers

Brady Pipemarkers featuring self-sticking vinyl markers printed with weather resistant inks and offer excellent indoor/outdoor durability and superior adhesion. Temperature rated from -40° to 180° F. Excellent application for both non-insulated and jacketed insulated pipes. Features a wide range of legends and sizes to fit all common size pipes.

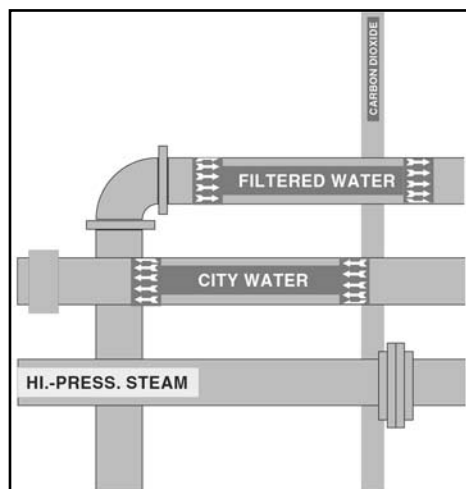

All pipemarkers conform to ANSI Standard A13.1-1981, entitled "Scheme for the Identification of Piping Systems, developed to " promote greater safety, by lessening the chance for error, confusion, or inaction especially in times of emergency." This standard considers legend to be primary and explicit for identification of content. Arrows shall be "used to indicate the direction of flow.


Why Mark Your Pipes?

Safety — Unmarked pipes mean danger to both life and property. Injuries have occurred through ignorance of pipe contents, particularly in the cases of new employees or when outside agencies are called in under emergency situations.

Economy — Reduce the probability of mistakes costing thousands of dollars with proper pipe identification. Employees no longer need to search for blueprints to trace piping. Employee training is also simplified with visually instructive marking.

Appearance — Bold Gothic characters on colorful ANSI/OSHA coded backgrounds command attention. Printed markers provide unmistakable identification; sharp-edged color bands add impact and high visibility.

For a full listing of available style and legends, please contact Inside Sales

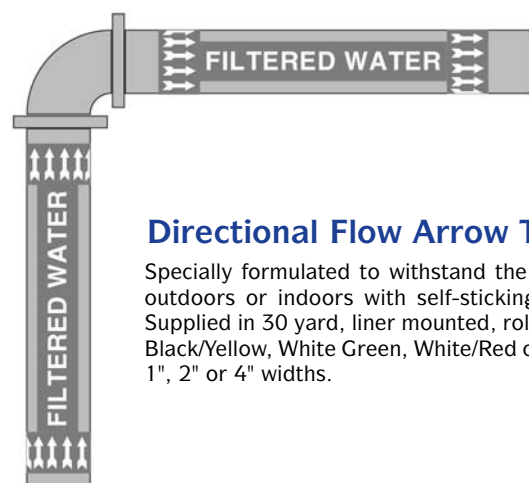

Directional Flow Arrow Tape

Specially formulated to withstand the elements. Use outdoors or indoors with self-sticking pipemarkers. Supplied in 30 yard, liner mounted, roll form. Choose Black/Yellow, White Green, White/Red or White Blue in 1", 2" or 4" widths.



Lightweight Safety Padlock

Special "Safety Lockout" markings and labels. 1-1/2" wide, 1-3/4" tall non-conductive Xenoy™ body. Extra-long standard steel shackle. Restricted safety lockout 6-pin tumbler. Key retaining feature. Eight color options: Red (RED), Orange (ORJ), Yellow, (YLW), Green (GRN), Blue (BLU), Teal (TEAL), Purple (PRP), and Black (BLK). Add desired color suffix to Part Number.

Part No.	Description
410	Keyed Different. 1-1/2" Shackle
410LT	Keyed Different, 3" Extra Length Shackle
410KA	Keyed Alike, 1-1/2" Shackle
410KAL	Keyed Alike, 3" Extra Length Shackle
410MK	Master Keyed, 1-1/2" Shackle
410KAMK	Keyed Alike, Master Keyed 1-1/2" Shackle

KIDDE Multi-Purpose Dry Chemical Extinguishers

Multi-purpose ABC extinguishers utilize mono-ammonium phosphate dry chemical to extinguish Class A, B or C fires. Designed for industrial use, they provide many years of trouble free service.

Units feature large, easy-to-read pressure gauges and convenient upright squeeze grip operation.

Each extinguisher comes with its own mounting bracket. All are U.S. Coast Guard approved.

Part No.	Model	UL Rating	Discharge Time (sec.)	Discharge Range (ft)
466227	PRO2.5 MP	1-A:10-B:C	8 - 10	6
466288	PRO4 MP	2-A:10-B:C	8 - 10	12
466112	PRO5 MP	3-A:40-B:C	13 - 15	18
466204	PRO10 MP	4-A:60-B:C	19 - 21	20
466206	PRO20 MP	10-A:80-B:C	19 - 22	20





Type 1 Barricade

Constructed of 1/2" outdoor grade plywood with 1-1/4" x 1-1/4" x 1/8" steel angle iron legs painted white. 36" high in open position, 12" top panel; 6" bottom panel. Top panel includes engineering-grade reflective sheeting to meet all Federal and State requirements. Available in 24" wide and 36" wide models. Barricade light sold separately.



Part No.	Description
1HM-0009	24" Barricade
1HM-0008	36" Barricade

Barrier Flasher Light

Flashing amber light is weatherproof, with tamper resistant switch. 7" high-impact resistant lexan lens. Rotates 360°. Powered by two 6 volt batteries (not included). Features photocell operation. Unit automatically operates at dusk.



Part No.	Description
1BP-0016	Flasher

Traffic Cones


Traffic cones feature orange/red PVC material flow molded over white inner liner. Standard weights. Will stand up to the hottest summers and coldest winters. Available in all sizes, from 12" to 36" heights. **Selective Collars:** Meets MUTCD requirements for nighttime visibility. Upper 6" collar and lower 4" collar.



Part No.	Description
3004020	12" Cone, Black Base
3004023	18" Cone, Black Base
3004057	28" Cone, Black Base
3005159	36" Cone, Black Base
3004254	28" Cone, Reflective, Blk Base
3004245	28" Cone, Reflective, Orange Base

Call For Many Other Safety Vest Configurations and Style - We Have A Style for Any Application!


Printed Barricade Tape

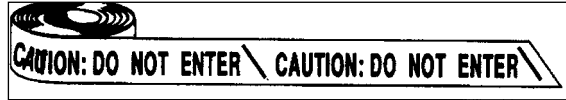


Available in 3" x 1000' x .004 polyethylene with various repeating legends. Caution legends are printed on yellow. Danger legends are printed on red. Non-adhesive.

Caution Series		Danger Series	
Part No.	Legend	Part No.	Legend
1EF-0005	Caution Caution	1-EF-0021	Danger Danger

Buffalo Bargard® Protector Caps

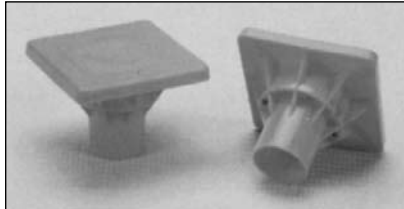

Bargard® Protector Caps

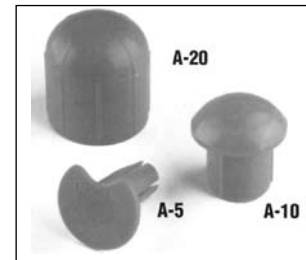

Part No.	Description / Color
23704	A-5 Fits diameters 3/8" to 3/4", lime green
23700	A-10 Fits diameters 3/8" to 1-1/4", lime green
23706	A-10 Fits diameters 3/8" to 1-1/4", lime green
23702	A-20 Fits diameters 1" to 2-1/4", lime green
23707	Buffalo Bargard, orange Fits No. 3 - 9, 3/8" - 1-1/4" for impalement protection with height up to 7'6" and 250 lb

Warnings:

Bargard® Protector Caps

BarGard® caps are not designed or intended to provide impact or impalement protection. They are not a substitute for covering vertical reinforcing steel with timber, as recommended by OSHA, and are not recommended for use when protection from falls is required. For additional information on acceptable methods of guarding against impact or impalement, consult OSHA CFR Title 29, Part 19120, ANSI A10.9-1983, and your state regulations for specific requirements.

Buffalo Bargard® Protector Caps

Buffalo Bargard® provides impalement protection from concrete reinforcing bars (No. 3 - 9, 3/8" - 1-1/4") for height up to 7'6" and 250 lb when properly installed. Failure to properly install will significantly decrease any impalement protection that may otherwise be provided by the Buffalo Bargard® and may result in injury. For information on the requirements of guarding against impalement, consult OSHA CFR Title 29, Section 1926.701 et. seq. For additional information on fall protection, consult OSHA CFR Title 29, Part 1926 - Safety A10.9-1983, and your state regulations for specific requirements.

Traffic Safety Vests



ANSI Class I Deluxe Styles - 4 Pocket design for increased carrying space. Rugged color matched front zipper closure. Mesh option includes CoolDRY fabric which is ultralightweight, breathable, and removes moisture. 360 degree visibility with high intensity tape. Machine washable. CoolDRY™ 100% polyester moisture management fabric wicks away excess moisture. **Specify Size when ordering.**

Part No.	Description / Color
30009840	Orange CL1 w/Lime Hi-Int Reflective Sz L
30009841	Orange CL1 w/Lime Hi-Int Reflective Sz XL
30009842	Orange CL1 w/Lime Hi-Int Reflective Sz XXL
30009843	Orange CL1 w/Lime Hi-Int Reflective Sz XXXL
30009844	Orange CL1 w/Lime Hi-Int Reflective Sz XXXXL

