



WIDE FLANGE PURLIN CLAMP

CADDY FIG. #315

411 BURNHAM ST.
P.O. BOX 280186
EAST HARTFORD, CT 06108
TEL (860) 289-0285 FAX (860) 282-1487
TOLL FREE 1-800-969-0285

Malleable Iron Purlin Clamp Black


- Size Range: 3/8" rod size
- Surface Finish: Black, Electro-zinc plated
- Structural attachment to lower flange of metal beams or purlins with 45° flanges up to 2" long and 90° flanges up to 1-1/2" high
- Set screw made of hardened steel
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI/MSS-SP-58 (Type 23); install in accordance with ANSI/MSS-SP-69
- Setscrew must be tightened and torqued onto the sloped side of the I-beam



Part Number	RS	A	B	C	Set Screw	Max. Pipe Size	Max. Rec. Load (lbs)
Plain Finish							
3150037PL	3/8	2"	1 1/2"	1"	3/8"	4"	400
Electro-zinc Plated Finish							
3150037EG	3/8"	2"	1 1/2"	1"	3/8"	4"	400

Recommended Torque** (for setscrews):

Setscrew Size	1/4 - 20	3/8 - 16	1/2 - 13	5/8 - 11	3/4 - 10
Foot-lbs	4	5	11	21	34
Nm	(5)	(7)	(15)	(28)	(46)

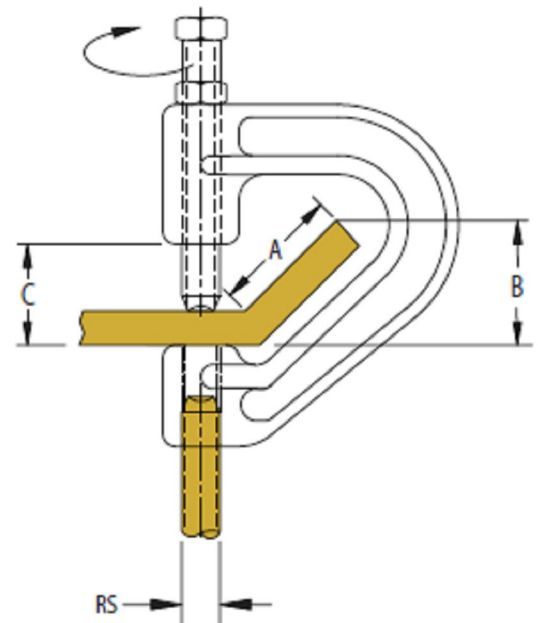

SUBMITTAL INFORMATION

CUSTOMER:		APPROVAL STAMP	
PROJECT NAME:			
PROJECT NUMBER:	SECTION:		
PARAGRAPH:	OTHER:		

REV: A

2008